

VECTOR



YOU CARRY WE CARE









For every mission, There is a vector.



Delivering fresh and frozen goods from "farm to fork" is a complex process. Having the right equipment to handle the various logistical steps involved will be a key factor in your success.

Our Vector range helps you take on the challenge with three specialised refrigeration units. Each designed to maximise your cold chain performance, optimise your cost of ownership and minimise impact on the environment.



VECTOR 1350


Light weight and ease of use for national and international long haul deliveries

VECTOR 1550

Versatility and optimised cost of ownership for long haul deliveries and distribution assignments requiring frequent door openings

VECTOR 1950

Precise temperature control for deliveries of sensitive goods and intense distribution assignments requiring multi temperature and multiple door openings

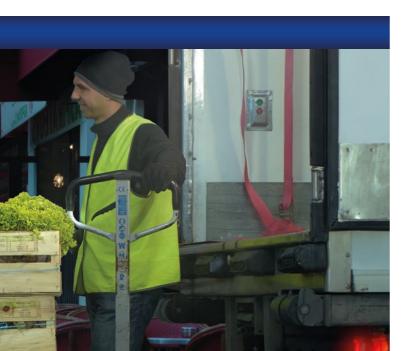

Light & Simple



MISSION

Your mission requires you to maintain a constant temperature over a long distance with maximum payload and minimum downtime?


SOLUTION

The Vector 1350 unit combines the simplicity of belt-driven technology with the efficiency of patended electric technology. Designed for effortless long haul transportation with an optimized capacity of 12 700 Watts, the Vector 1350 unit is also available in Stand-by version.

TECHNOLOGY

The engine drives both a compressor and a generator to power the ventilation system. Electrical fans reduce the number of belts significantly improving the reliability while optimized capacity enabled downsized 1,1 L engine, achieving significant fuel savings.



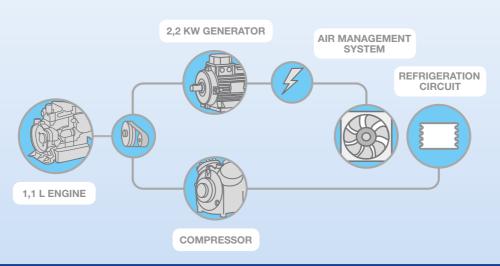

SIMPLE TO USE

The new cabin-like display is userfriendly.



EASY TO MAINTAIN

With proven technology, widely available parts and easy access to components, your fleet can be quickly and easily maintained.

LIGHTWEIGHT

At just 645 kg, the Vector 1350 unit is one the lightest units in its class. It saves fuel by reducing the load on the truck while increasing payload.



Versatile & economical



MISSION

Your mission requires long haul temperature controlled transport and distribution with frequent door openings?


SOLUTION

The Vector 1550 unit combines efficient patented E-Drive technology with an economizer. Ready to handle a wide range of logistical challenges with low cost of ownership and a balanced capacity of 14 700 Watts.

TECHNOLOGY

The Vector 1550 unit is equipped with E-Drive technology. Benefiting from the economizer capacity boost, the hermetic compressor has been downsized enabling a reduction in engine size.



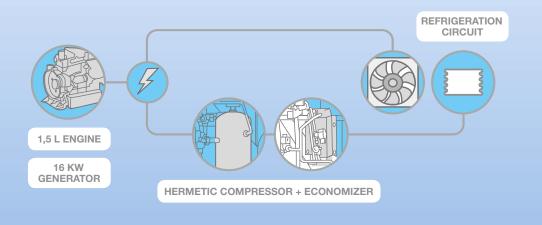




TECHNOLOGY

E-Drive technology removes mechanical transmissions found in belt-driven technology by transforming engine power into electricity.

FUEL EFFICIENT

While delivering 14 700 Watts, fuel consumption is significantly reduced.

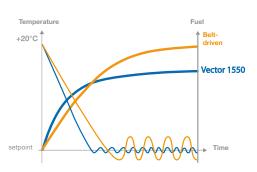

MAXIMUM UPTIME

Patented E-drive technology removes 17 serviceable parts for enhanced reliability, increasing uptime to 99,4%.

SUSTAINABLE TECHNOLOGY

With fewer moving joints and an hermetic compressor, patended E-drive technology helps to reduce dramatically dramatically reduces refrigerant leaks compared to belt-driven technology.



Power & control



MISSION

Your mission requires precise control of the cold chain with different temperatures and multiple delivery points?

SOLUTION

The Vector 1950 unit combines high refrigeration capacity with flexible compartment configuration. Perfect for the transportation of sensitive goods, intensive distribution, multiple door openings and multi-temperatures with a capacity of 18 800 Watts.


TECHNOLOGY

The Vector 1950 unit is equipped with patented E-Drive technology. Electric constant heating and a unique concept of simultaneous cooling and heating ensure maximum performance accross multiple compartments.




BENEFITS

E-Drive technology delivers superior cold chain performance while reducing CO₂ footprint and total cost of ownership.

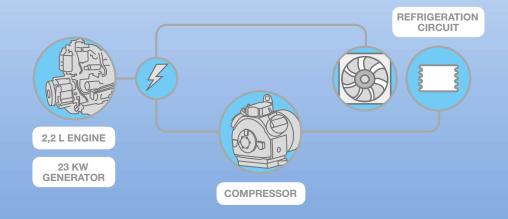

MULTI ZONE CONTROL

Freedom to customize your trailer.

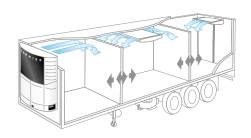

HIGH PERFORMANCE COOLING

The powerful Vector 1950 unit helps to protect your cargo with unparalleled pull down time, precise temperature control and homogeneous air distribution thanks to its 5 600 m³/h airflow.

CITY VERSION

For quiet night deliveries in urban areas, the Vector 1950 unit is Piek certified limiting noise up to 60dB(A).



Technology to drive your business

CONTROL INTELLIGENCE

CUSTOMISE YOUR TRANSPORT

Maximise the effectiveness of your fleet. Control system software programs can be used to reduce fuel consumption, run time, maintenance costs and greenhouse gas emissions. Available for Vector 1550 and Vector 1950 units.



INTELLISETTM

Selects custom profiles to balance cooling and fuel economy for different types of loads.



PRODUCTSHIELDTM

Monitors ambient temperature to optimize box environment.



OPTICOLD

Ensures tightest temperature control, for temperature sensitive applications.



ECOFUEL

Provides the right balance between temperature control and fuel consumption.



RANGE PROTECT

Select two Min/Max setpoints to safeguard cargo.



DOOR MAN™

Monitors door switches and adjusts unit operation to save fuel.



DATATRAKTM

Provides one-way or two-way remote monitoring and control.



PRETRIP

Triggers test unit operation before you leave.



FUELCHECKTM

In-tank ultrasonic sensor provides low-fuel alert for drivers.



KEYPAD LOCK

Avoids misuse of the control panel.

ACCESSORIES

EXPAND YOUR POSSIBILITIES

Boost driver efficiency and bottom line performance with a wide range of exclusive accessories.

- Datacold temperature recorders range
- Remote panels
 Reefer remote control
- Light bar kit Fridge status view at a distance
- · Dual sensor monitor
- Battery charger for Vector 1550 unit and Vector 1950 tail lift
- Battery guard
- Fuel warmer kit
- Noise kit
- Fuel tank
- TRUView_PC_tool to perform maintenance

		VECTOR 1350	VECTOR 1550	VECTOR 1950 & MT	VECTOR E	VECTOR 1550 CITY	VECTOR 1950 CITY & MT
COOLING CAPACITY ROAD (Watts)	0°C/+30°C	12 700	14 700	18 800	-	14 800 12 050 ⁽²⁾	18 500 14 500 ⁽²⁾
	-20°C/+30°C	8 250	8 200	10 100	-	8 150 6 700 ⁽²⁾	10 000 9 100 ⁽²⁾
COOLING CAPACITY STAND-BY(Watts)	0°C/+30°C	7 800(1)	12 800	15 400	15 400	12 500	13 750
	-20°C/+30°C	7 000(1)	7 100	9 100	9 100	7 050	9 450
HEATING CAPACITY (Watts)		9 300	8 800	9 000	5 800	8 800 5 000 ⁽²⁾	9 500 8 800 ⁽²⁾
AIRFLOW (m³/h)		5 500	5 700	5 700	4 800	5 700 4 600 ⁽²⁾	5 700 4 600 ⁽²⁾
WEIGHT (Kg)		645 690 ⁽¹⁾	704	931	623	725	681 Undermount box: 540
DIMENSIONS (mm)		2050 x 430 x 2227 Standardized mounting points throughout complete Vector range					2050 x 430 x 2227 Undermount box: 1500 x 540 x 800
SOUND PRESSURE (dB(A))	Standard	78	73	78	68	60 ⁽²⁾	60 ⁽²⁾
	Low Noise	76	71	76			

A European network of experts



LARGE NETWORK

Put your fleet in the hands of professionals. Using the latest equipment, 2000 fully trained technicians across 600 service centres are ready to keep your fleet on the road. We'll assist you wherever you are, 24 hours a day.

QUALITY PARTS

The right parts at the right time. Rely on Carrier Genuine Performance Parts and you can be confident your fleet benefits from the best quality, availability, choice and cost efficiency.

ON CONTRACT

Plan ahead for peace of mind. Our everCOLD contract ensure your equipment is always operating at maximum efficiency.



Discover Vector website: www.carriervector.com





Carrier Transicold Europe S.C.S. L'Européen Bâtiment D 4 rue Joseph Monier F-92500 Rueil-Malmaison Phone: +33 (0)1 41 42 28 00 Fax: +33 (0)1 41 42 28 28 www.carriertransicold.eu